


Putty and Mortar

Fabric and Quilt by Timeworn Toolbox Designs

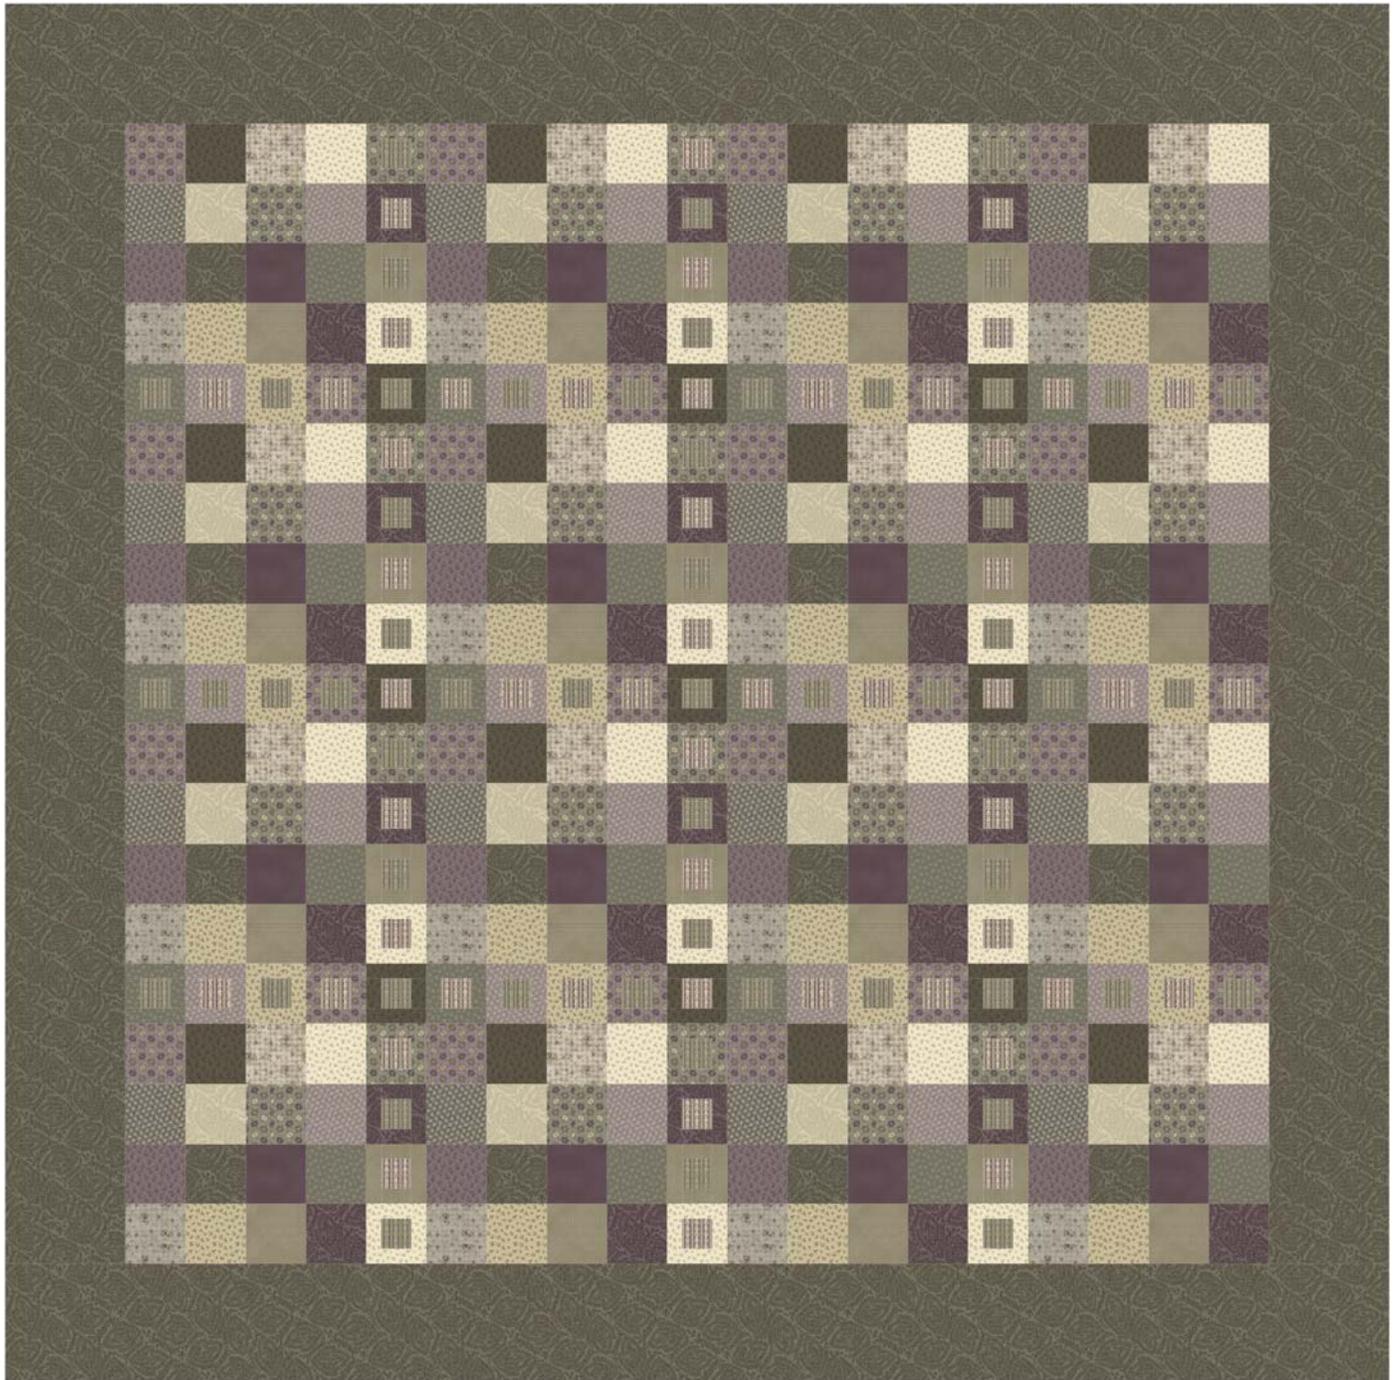

69" x 69"

FABRIC REQUIREMENTS & CUTTING GUIDE

Finished Size: 69" x 69"

Unfinished Block size: 12-1/2" x 12-1/2" Finished Block size: 12" x 12"

Fat Quarter EACH of (14) assorted prints:
2530-0177, 2530-0188, 2535-0177, 2535-0144, 6140-0177, 6140-0144,
2536-0177, 2536-0144, 2536-0188, 6141-0177, 2537-0177, 2537-0144,
6142-0177, 6142-0144

Fat Quarter EACH of (2) assorted stripes:
2531-0177, 2531-0144

1 yard of 6141-0144 (includes binding)

1-3/4 yards of 2530-0144

4-3/8 yards of backing

77" x 77" piece of batting

Cutting: (Refer to Diagram 1 for cutting the FQs.)

From EACH of (7) of the assorted prints, cut:

(16) 3-1/2" x 3-1/2" squares

(14) 1-1/4" x 3-1/2" strips

(14) 1-1/4" x 2" strips

From EACH of the remaining (7) assorted prints, cut:

(16) 3-1/2" x 3-1/2" squares

(12) 1-1/4" x 3-1/2" strips

(12) 1-1/4" x 2" strips

From the (2) assorted stripes, cut a total of:
(105) 2" squares

From 6141-0144, cut:

(16) 3-1/2" x 3-1/2" squares

(14) 1-1/4" x 3-1/2" strips

(14) 1-1/4" x 2" strips

(8) 2-1/2" x 42" binding strips

From 2530-0144, cut:

(16) 3-1/2" x 3-1/2" squares

(14) 1-1/4" x 3-1/2" strips

(14) 1-1/4" x 2" strips

(7) 6-1/2" x 42" strips

3-1/2" sq	3-1/2" sq	3-1/2" sq	3-1/2" sq	3-1/2" sq	1-1/4" x 3-1/2"
3-1/2" sq	3-1/2" sq	3-1/2" sq	3-1/2" sq	3-1/2" sq	1-1/4" x 3-1/2"
3-1/2" sq	3-1/2" sq	3-1/2" sq	3-1/2" sq	3-1/2" sq	1-1/4" x 3-1/2"
3-1/2" sq	1-1/4" x 3-1/2"				
1-1/4" x 2"	1-1/4" x 2"	1-1/4" x 2"	1-1/4" x 2"	1-1/4" x 2"	1-1/4" x 2"

INSTRUCTIONS:

Making the Sixteen-Patch Blocks:

- Lay out (1) square of each of the (16) assorted 3-1/2" x 3-1/2" print squares in 4 rows of 4 squares each.
- Sew the squares together in each row. Press rows 1 and 3 to the right. Press rows 2 and 4 to the left.
- Sew the rows together, nesting the seams. Press seams open to make a 12-1/2" x 12-1/2" sixteen-patch block. Make a total of (16) sixteen-patch blocks.

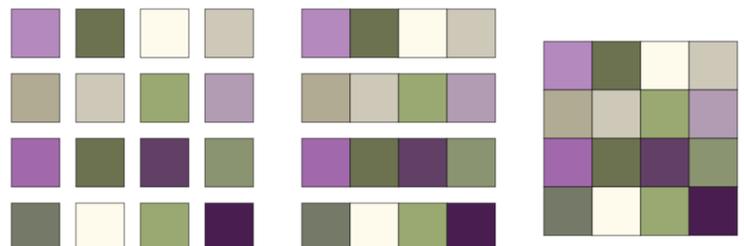


Diagram 2

Make 16

continued

Making the Sashing Units:

4. Sew (2) 1-1/4" x 2" print strips of the same print to opposite sides of (1) 2" x 2" striped square. Press seams toward the print strips.
5. Sew (2) 1-1/4" x 3-1/2" print strips of the same print to the remaining sides of the square to make a 3-1/2" x 3-1/2" sashing unit. Press seams toward the print strips.
6. Using the remaining 2" x 2" striped squares and the remaining 1-1/4" x 2" and 1-1/4" x 3-1/2" print strips, make a total of (105) 3-1/2" x 3-1/2" sashing units.

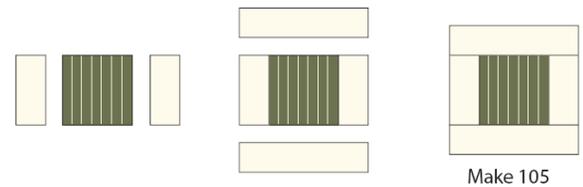


Diagram 3

Quilt Assembly: (Refer to Diagram 4 for quilt assembly)

7. Sew (4) assorted sashing units together to make a 3-1/2" x 12-1/2" horizontal sashing strip. Press the seams open. Make a total of (12) horizontal sashing strips.

8. Sew (19) assorted sashing units together to make a 3-1/2" x 57-1/2" vertical sashing strip. Press the seams open. Make a total of (3) vertical sashing strips.

9. Sew (4) sixteen-patch blocks, alternating with (3) horizontal sashing strips vertically as shown, to make a block row. Make 4 block rows.

10. Sew the (4) block rows, alternating with (3) vertical sashing strips as shown, to complete the 57" x 57" quilt top.

Border:

11. Sew the short ends together of (7) 6-1/2" x 42" 2530-0144 strips to make a long strip.

12. Crosscut the long strip into (2) 57-1/2" lengths and (2) 69-1/2" lengths.

13. Sew the 57-1/2" lengths to the sides of the quilt. Press seams toward the border strips

14. Sew the 69-1/2" lengths to the top and bottom of the quilt. Press seams toward the border strips to complete the 69-1/2" x 69-1/2" quilt.

Finishing:

15. Cut the 4-3/8 yards of backing fabric into (2) 77" x WOF panels. Using a 1/2" seam allowance, sew the selvage edges of the 2 panels together to make a backing. Press the seam open. Trim backing to measure 77" x 77". Layer the quilt top, batting and backing. Quilt as desired.

16. Bind the quilt with double-fold binding made with (8) 2-1/2" x 42" 6141-0144 binding strips.

